

TECHNICAL DETAILS

Insulation

- Light refractory brick + ceramic fiber blanket

Heater

- Pine ridge burner

Temperature Controller

- Optional

Construction

- Welded steel tubes + 3 mm steel plate

Kiln Atmosphere

- Oxidizing/Neutral (Standard)
- Reducing (Optional)

Standard Colour

- Beige (RAL 7032 W) + Orange (RAL 2004 W)
(Different colours can be selected)



GGH/BGN 035/0050/30




No	Order Code	Internal Dimensions -[cm]		No of Door Sets	Opening Dimensions -[cm]	
		Diameter	Length		Minimum	Maximum
1	GGH/BGN 025/0015/20	25	30	1	12	20
2	GGH/BGN 030/0025/25	30	35	1	15	25
3	GGH/BGN 035/0050/30	35	50-60	1	20	30
4	GGH/BGN 040/0075/35	40	60-70	1	25	35
5	GGH/BGN CUST/---/--	to your size			--	--

Double ended glory holes are also available!



GGH/BGN 035/0050/30-Double ended

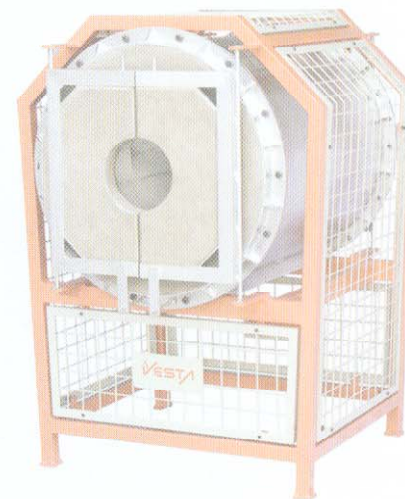

No	Order Code	Internal Dimensions -[cm]		No of Door Sets	Opening Dimensions -[cm]	
		Diameter	Length		Minimum	Maximum
1	GGH/MST 045/0100/40	45	65-80	2	20	40
2	GGH/MST 050/0150/40	50	75-90	2	20	40
3	GGH/MST 055/0175/45	55	75-95	2	20	45
4	GGH/MST 060/0200/50	60	70-90	2	25	50
5	GGH/MSTO CUST/---/--	to your size			--	--

Double ended glory holes are also available!




GGH/MST 050/0150/40



No	Order Code	Internal Dimensions -[cm]		No of Door Sets	Opening Dimensions -[cm]	
		Diameter	Length		Minimum	Maximum
1	GGH/GFR 065/0300/55	65	90-105	3	20	55
2	GGH/GFR 075/0400/60	75	90-115	3	25	60
3	GGH/GFR 085/0650/70	85	115	3	30	70
4	GGH/GFR 090/0800/75	90	125	3	30	75
5	GGH/GFR 100/1000/85	100	130	4	25	85
6	GGH/GFR CUST/----/--	to your size		--	--	--

Double ended glory holes are also available!

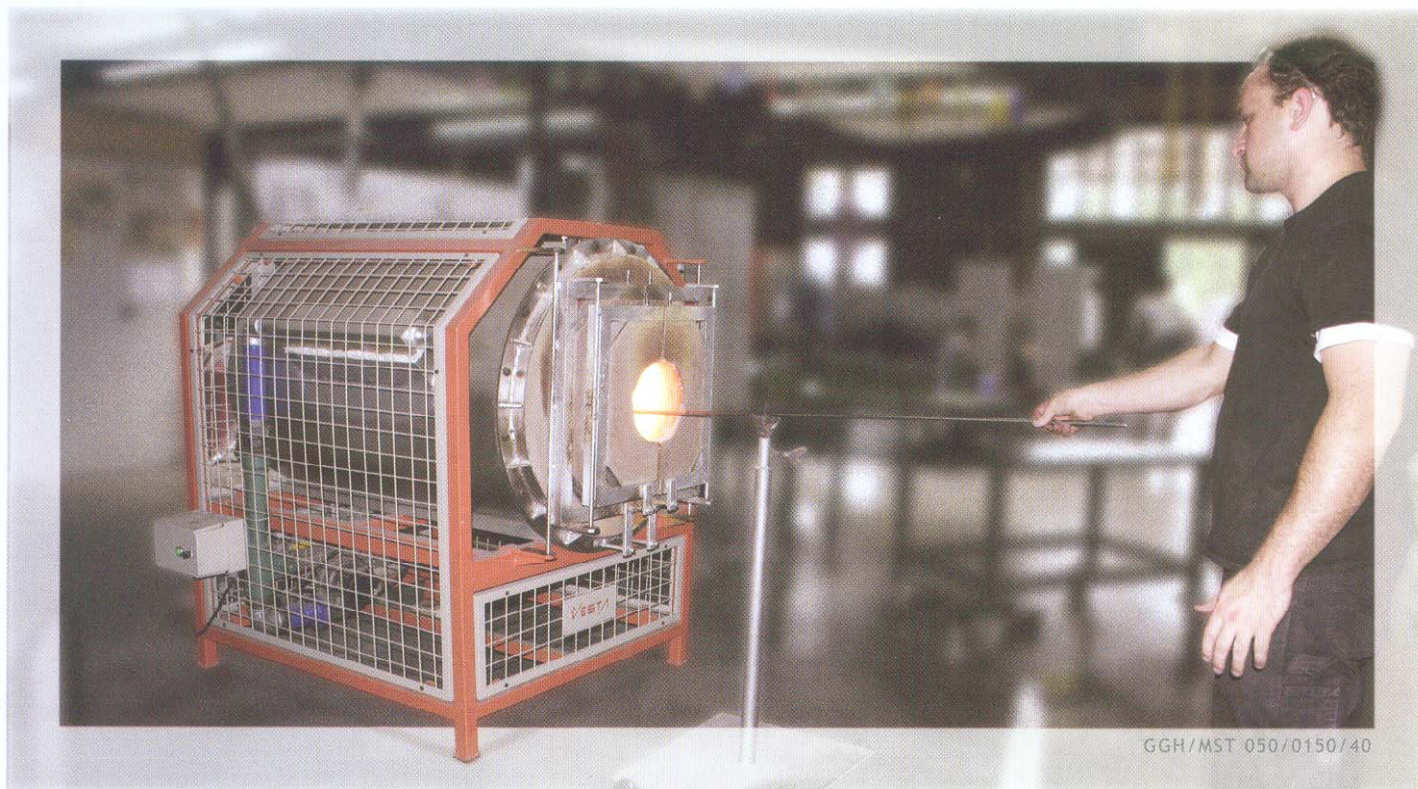

GGH/MST 050/0150/40